REDISPAN

++/32/(0)3/830 22 88
++/32/(0)71/20 69 20

Redirack

Each frame has 2 reversible uprights and a number of horizontal (C) & diagonal (D) bracing. Assemble as shown. Insert the feet (plastic, plastic adjustable or steel) after assembling the frame. Steel feet are just slided into the upright. Double uprights only need 1 steel base. Insert beams with a hammer and secure with 2 safety pins. Max. distance between 2 levels : 1500 mm.

Jeder Regalrahmen ist aufgebaut aus 2 Saule (umkehrbar) und Horizontal (C) & Diagonal (D) Streben. Montieren Sie wie angedeutet. Fuss (Kunststoff, Regelbar order Stahl) setzen Sie nach Montage des Regalrahmen. Der Stahl Fuss ist einfach in die Saule zu gleiten. Doppele Saule brauchen nur 1 Stahl Fuss. Balken montieren mit ein Hammer und sicheren mit 2 Sicherungsstifte. Maximum Abstand zwischen 2 Niveaus : 1500 mm.

FRAME 2 UPRIGHTS (3 on request)
REGALRAHMEN 2 SAULE (3 auf Anfrage)





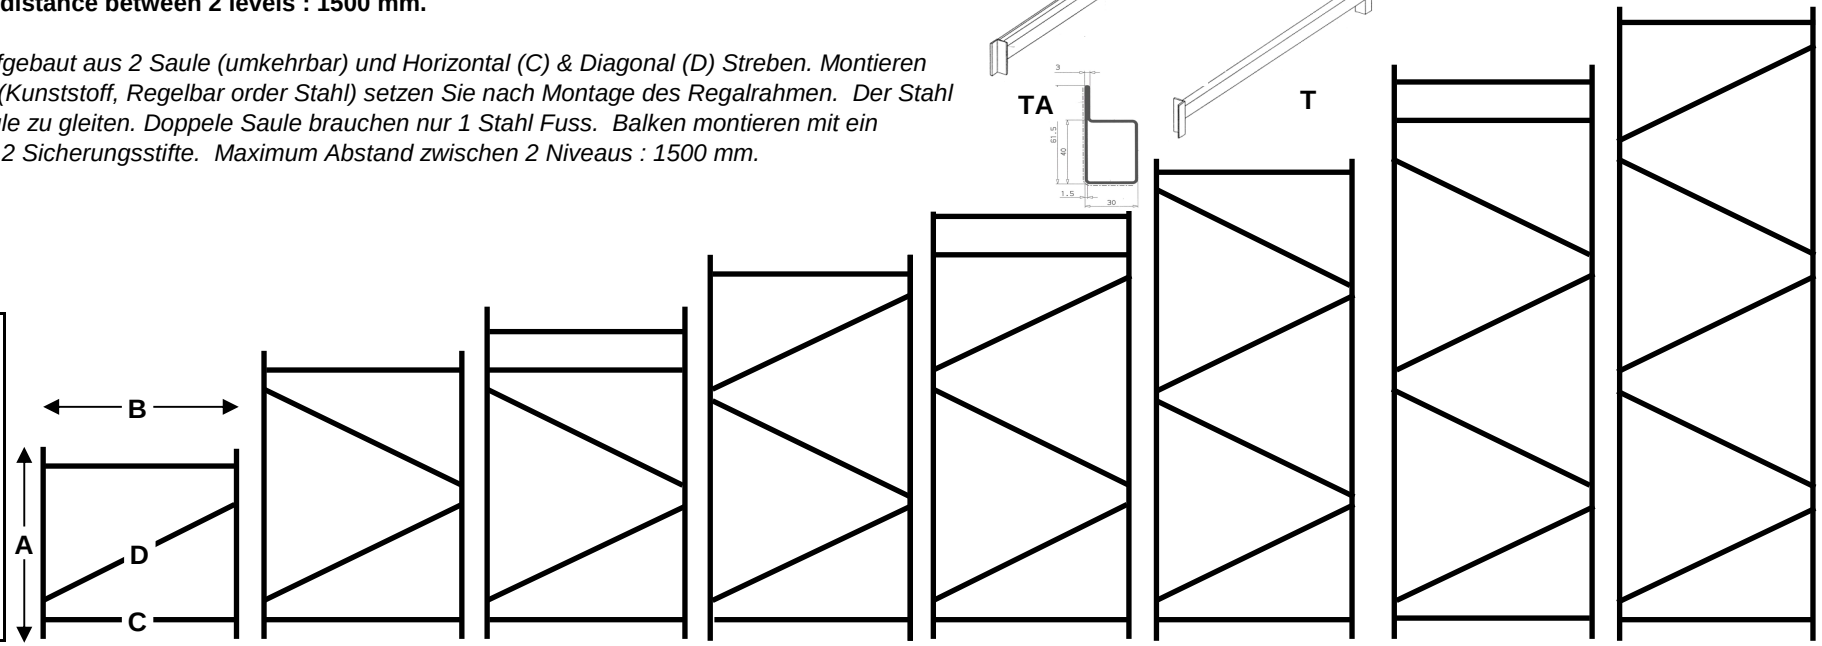

B (mm) ⇩	A (mm) ⇨		725⇨1000		1500		1750		2000		2250		2500		3000		3250	
	(mm)	(mm)	C	D	C	D	C	D	C	D	C	D	C	D	C	D	C	D
400	**C** 353	**D** 623	2	1	2	2	3	2	2	3	3	3	2	4	3	4	2	5
500	**C** 453	**D** 684	2	1	2	2	3	2	2	3	3	3	2	4	3	4	2	5
600	**C** 553	**D** 752	2	1	2	2	3	2	2	3	3	3	2	4	3	4	2	5
800	**C** 753	**D** 908	2	1	2	2	3	2	2	3	3	3	2	4	3	4	2	5
1000	**C** 953	**D** 1079	2	1	2	2	3	2	2	3	3	3	2	4	3	4	2	5
M6x10			6		8		10		10		12		12		14		14	

M6x10 : use 6,2 mm perforation / *bitte gebrauchen Sie die 6,2 mm Lochung*
M6x10 can be replaced by rivets 4,8x12 using the 4,9 mm perforation / *M6x10 könnte ersetzt werden durch Nietnagel 4,8x12 in die 4,9 mm Lochung.*